

## E-40

(Model HEHE40 AU)

Heat Output	▪	10.6kW av
Efficiency	▪	62% av
Coverage	▪	up to 150m <sup>2</sup>
Emissions	▪	1.4 grams/kg



Cast in their own foundry the E-40 from Hergom has a contemporary design incorporating crisp, straight edges that offer a rigid contrast to the fluidity of the flames, visible through the large glass front.

Providing a constant, gentle warmth due to the heat retention properties of its robust cast iron, the E-40 continues to emit heat even after the fire has died down.

The smallest details on the unit are designed to delight - like the black steel handle that blends seamlessly with the rich dark grey of the cast iron body.

Even the internal plates of the combustion chamber are made of cast iron, and the white enamelled coating on the side and back panels reflect more heat into the room as well as highlighting the brilliance of the fire as never before.

In the more than fifty years of professional experience, Hergom has perfected its production process, controlling first-hand the design, casting and manufacturing of each of its products.



Today they are one of the leading companies in the heating sector worldwide, with five manufacturing and operations points in Europe and America.

### Clearances

### Dimensions

### Features

Hearth	Width	Depth	Thickness
depth inc 320mm in front and 275 at rear. Thickness: Equal to 9mm Bellis Board or equivalent	860	1025	9

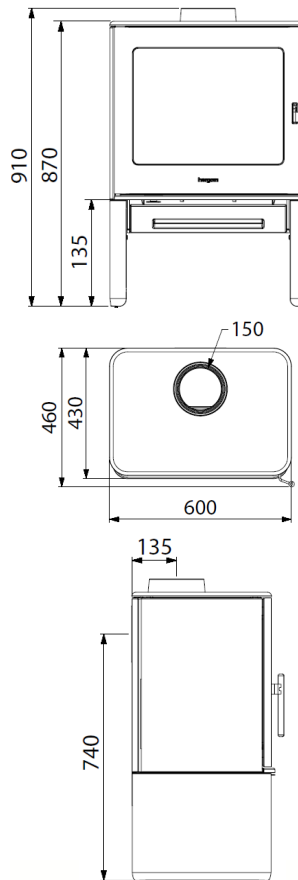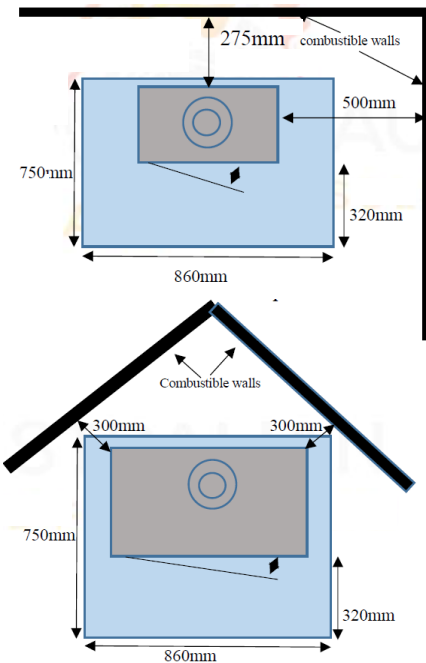

#### STANDARD FEATURES

- Manufactured almost entirely from cast iron
- Overnight burning capacity
- Combustion chamber with high-strength cast iron panels coated in white enamel reflect more heat into the room as well as highlighting the brilliance of the fire
- Superior air wash cleaning system. Air currents sweep the inner part of the glass, keeping it free of dust and particles for unparalleled fire viewing
- Removable ash-draw for a clean convenient disposal of ashes
- Single air control for ease of operation
- Advanced combustion system
- Leveling leg screws to stabilize the fire if installed on an irregular surface
- Hinged front door with ceramic glass pane
- Vertical smoke exit through the top with the option to switch to a Horizontal smoke exit through the Rear
- Weight : 150kilos
- Maximum log width : 450mm
- Flue Spigot Size : Ø 150mm 6inch
- Internal Firebox : 500[w] x 170[d] x 285-397[h]
- Viewing Area : 455[w] x 350[h]
- Warranty : Limited 5 years manufactures

Flue Shield Configuration	Rear	Side	Front	Corner
No shielding	-	-	-	-
With Firebox Rear Heat Shield and Flue Shield	275	500	320	300

CLEARANCES BASED ON INSTALLATION WILDCAT 6" TRIPLE SKIN FLUE KIT WITH 8" SOLID CASINGSOLID DECORATIVE FLUE SHIELD AND REAR HEAT SHIELD

Information supplied is to assist you in your choice of a suitable fire. It is not intended to be all the information required to install the fire and does not replace the installation manual which provides more detailed information. In the interest of product development Hergom reserves the right to change specifications without prior notice.

All measurements are in millimetres unless otherwise stated.

